


SECTION A-A

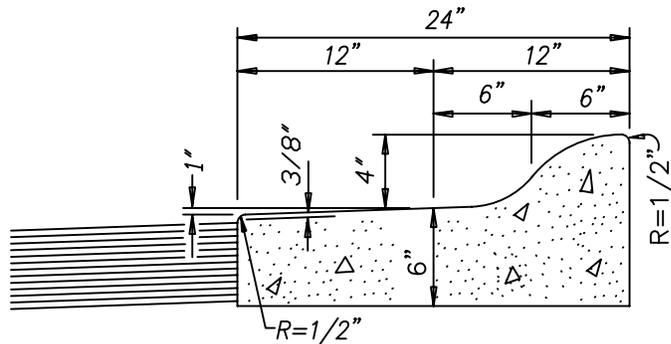

ROLLED CURB DETAIL

NOTES:

1. FOR A, B, C, AND D, REFER TO STD.-102-L.
2. TOP OF ROLLED CURB PLANTER SHALL BE 0.30 FEET ABOVE THE HIGHEST EXTERIOR CURB ELEVATION.
3. CONCRETE FOR ROLLED CURB SHALL BE 560-C-3250.
4. R=42' MIN. WITHOUT PARKING ADJACENT TO CURB, 50' MIN. WITH PARKING ADJACENT TO CURB.
5. NO PARKING ADJACENT TO PLANTER.

REV. 01/2003

**CITY OF NEWPORT BEACH
PUBLIC WORKS DEPARTMENT**

APPROVED:

[Signature]
DIRECTOR OF PUBLIC WORKS
R.C.E. NO. 36106

CUL-DE-SAC WITH PLANTER

DATE 11/13/2002

SCALE N.T.S.

DRAWN M. GRACIA

STD-103-L