



**PLAN**

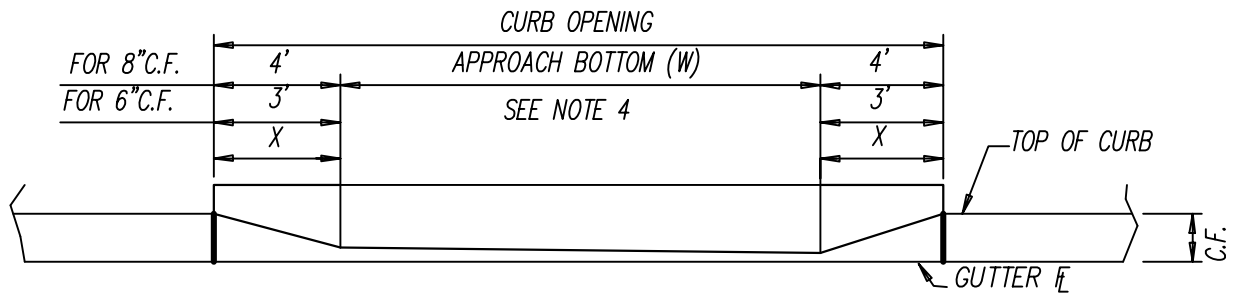

**ELEVATION**

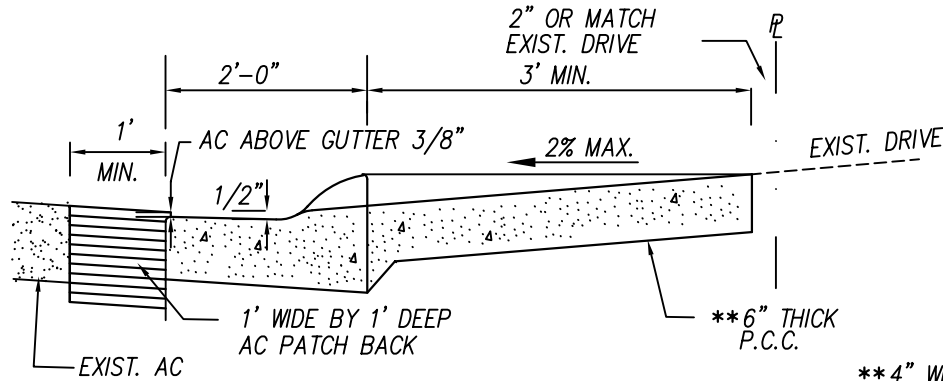

**SECTION A-A**

\*\*4" WITH ENGINEER'S APPROVAL FOR NON-STANDARD PAVERS

**NOTES:**

1. WHEN REMOVING EXISTING SIDEWALK, CURB AND GUTTER, SAWCUT AND REMOVE TO NEAREST EXISTING JOINT WITHIN 5 FEET BEYOND OPENING.
2. SLOPED "X" AREAS AND SLOPE DRIVEWAYS SHALL HAVE A COARSE BROOM FINISH.
3. CONCRETE SHALL BE 560-C-3250.
4. "W" SHALL BE MINIMUM OF 10' AND A MAXIMUM OF 20' EXCEPT IN CASE OF THREE CAR GARAGE WHERE "W" MAY EQUAL 25' OR 32' FOR A 4 CAR GARAGE.

<p><b>CITY OF NEWPORT BEACH</b> PUBLIC WORKS DEPARTMENT</p>	<p>APPROVED:</p> <p>PUBLIC WORKS DIRECTOR</p>
<p><b>RESIDENTIAL DRIVEWAY APPROACH TYPE III</b></p>	<p>RCE NO. 36106</p>
	<p>Drawn: M.Wagner</p>
	<p>Date: Jan. 2004</p>
<p><b>DRAWING NO.</b></p>	<p><b>STD-164-L</b></p>